


Tret Sky

design: arch.Margarita Kroucharska





Tret Sky illumina idealmente percorsi pedonali in aree pubbliche e residenziali. Il design e' sobrio ed essenziale, adeguato a inserimenti armonici nel contesto ambientale. La linea e' costituita da elementi realizzati in alluminio pressofuso ed estruso. La possibilita' di accostarli in soluzioni differenti, consente di ottenere risultati estetici personalizzati e unici. Rispetta le norme anti-inquinamento luminoso.

TRET SKY is a urban column 4400mm height made of die-cast aluminium with reflector in fiber glass for indirect lighting .TRET SKY is suitable for applications in public areas ,parkings and city centres . Dark sky system is provided to match most restrictive regulations on cut-off indirect light emissions.

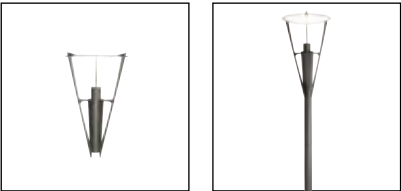

CERTIFICAZIONI <i>CERTIFICATION</i>	 
	versioni led disponibili: 3000 K / 4000 K <i>LEDs available: 3000 K / 4000 K</i>
GRADO DI PROTEZIONE <i>IP / IK RATING</i>	IP 65 <i>IP 65</i>
CLASSE DI ISOLAMENTO <i>CLASSIFICATION</i>	classe I  classe II su richiesta <i>class I class II upon request</i>
CORPO <i>BODY</i>	alluminio fuso EN AC 44100 alta resistenza all' ossidazione <i>cast aluminium EN AC 44100 high resistance to oxidation</i>
PALO (CE) <i>COLUMN (CE)</i>	alluminio estruso - anima in ferro zincato - da interrare <i>extruded aluminium - zinc plated steel internal tude - to be rooted</i>
DIFFUSORE <i>DIFFUSER</i>	vetro sodico calcico temperato 5 mm <i>soda-lime tempered cast glass 5 mm</i>
VITERIA ESTERNA <i>EXTERNAL FIXINGS</i>	inox A4-70 trattata in soluzione lubrificante idrorepellente con alto potere antiossidante. Il trattamento assicura la facile apertura del prodotto durante la manutenzione <i>stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution. The treatment ensures easy opening of the product for maintenance</i>
GUARNIZIONI <i>SEALING GASKET</i>	silicone ricotto <i>silicone</i>
CABLAGGIO <i>WIRING</i>	apparecchio fornito con 5,5 m di cavo H07RN8-F pre cablato <i>fixture supplied pre-wired cable 5,5 m long H07RN8-F</i>
LAMPADINA <i>LAMP</i>	esclusa (Led incluso) <i>not included (Led integral)</i>
FINITURA <i>FINISH</i>	verniciatura in polveri poliestere ad alta resistenza ai raggi UV ed alla corrosione <i>powder coating polyester high resistance to UV and oxidation</i>

Tret sky




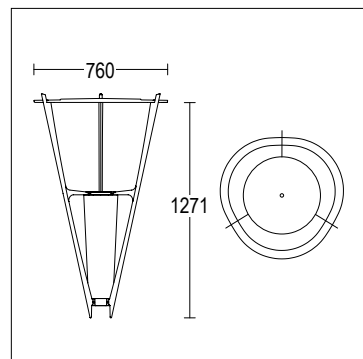


codice colori
colour codes




.05 grigio antracite
anthracite grey

.13 grigio chiaro
light grey






8317.HLX.T-- 55 W 1 Led 3000 K 6062 lm
8317.HMX.T-- 55 W 1 Led 4000 K 6344 lm
 220-240 V 50/60 HZ
 vetro trasparente *clear diffuser*
 alimentatore incluso *led driver integral*



8317.19F.T-- 70 W HIT G12 6600 lm
 230 V 50 HZ
 vetro trasparente *clear diffuser*
 alimentatore ferromagnetico incluso
conventional ballast integral



8317.21F.T-- 150 W HIT G12 14000 lm
 230 V 50 HZ
 vetro trasparente *clear diffuser*
 alimentatore ferromagnetico incluso
conventional ballast integral

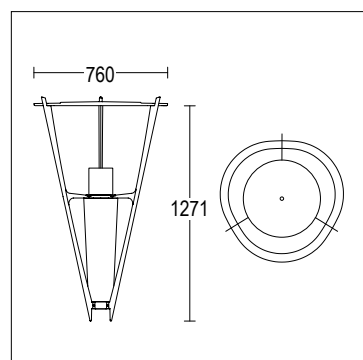




codice colori
colour codes




.05 grigio antracite
anthracite grey

.13 grigio chiaro
light grey



8314.19F.T-- 70 W HIT G12 6600 lm
 230 V 50 HZ
 vetro trasparente *clear diffuser*
 alimentatore ferromagnetico incluso
conventional ballast integral







8314.21F.T-- 150 W HIT G12 14000 lm
 230 V 50 HZ
 vetro trasparente *clear diffuser*
 alimentatore ferromagnetico incluso
conventional ballast integral






Tret sky

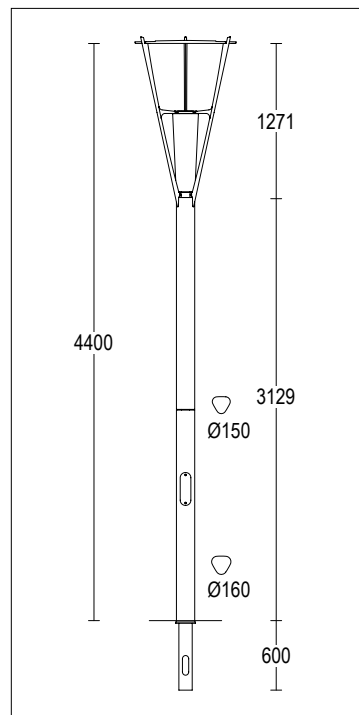




8312.HLX.T-- 55 W 1 Led 3000 K 6060 lm
8312.HMX.T-- 55 W 1 Led 4000 K 6344 lm
 220-240 V 50/60 HZ
 vetro trasparente *clear diffuser*
 alimentatore incluso *led driver integral*





8312.19F.T-- 70 W HIT G12 6600 lm
 230 V 50 HZ
 vetro trasparente *clear diffuser*
 alimentatore ferromagnetico incluso
conventional ballast integral






8312.21F.T-- 150 W HIT G12 14000 lm
 230 V 50 HZ
 vetro trasparente *clear diffuser*
 alimentatore ferromagnetico incluso
conventional ballast integral






Tret sky

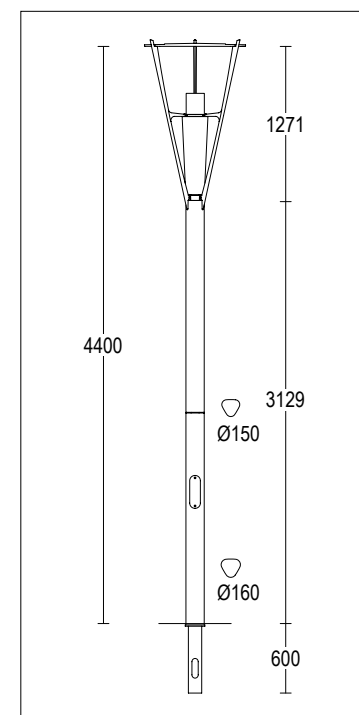


8315.19F.T-- 70 W HIT G12 6600 lm
 230 V 50 HZ
 vetro trasparente *clear diffuser*
 alimentatore ferromagnetico incluso
conventional ballast integral



8315.21F.T-- 150 W HIT G12 14000 lm
 230 V 50 HZ
 vetro trasparente *clear diffuser*
 alimentatore ferromagnetico incluso
conventional ballast integral



Tret sky

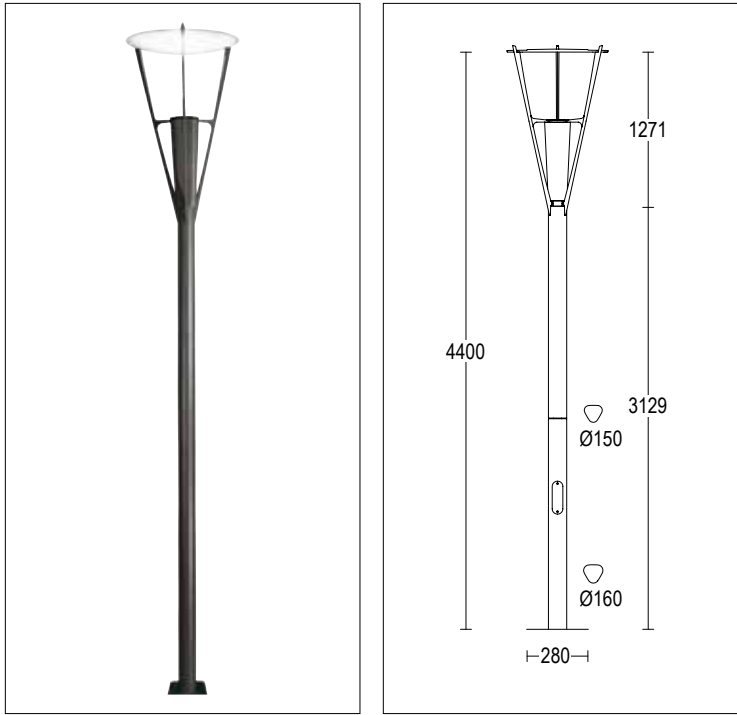

IP65


codice colori

colour codes


.05 grigio antracite
anthracite grey

.13 grigio chiaro
light grey


8313.HLX.T-- 55 W 1 Led 3000 K 6062 lm
8313.HMX.T-- 55 W 1 Led 4000 K 6344 lm
220-240 V 50/60 HZ
vetro trasparente *clear diffuser*
alimentatore incluso *led driver integral*

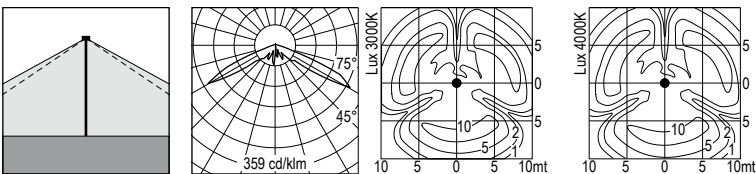


8313.19F.T-- 70 W HIT G12 6600 lm
230 V 50 HZ
vetro trasparente *clear diffuser*
alimentatore ferromagnetico incluso
conventional ballast integral

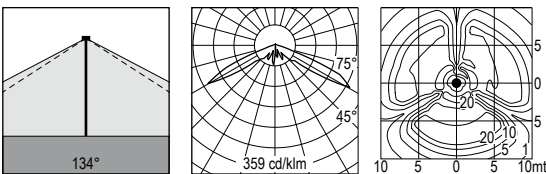

8313.21F.T-- 150 W HIT G12 14000 lm
230 V 50 HZ
vetro trasparente *clear diffuser*
alimentatore ferromagnetico incluso
conventional ballast integral

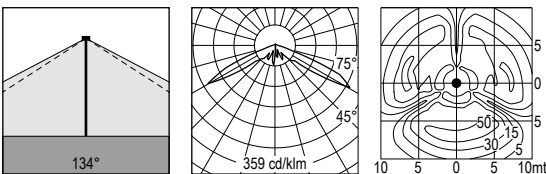

Tret sky

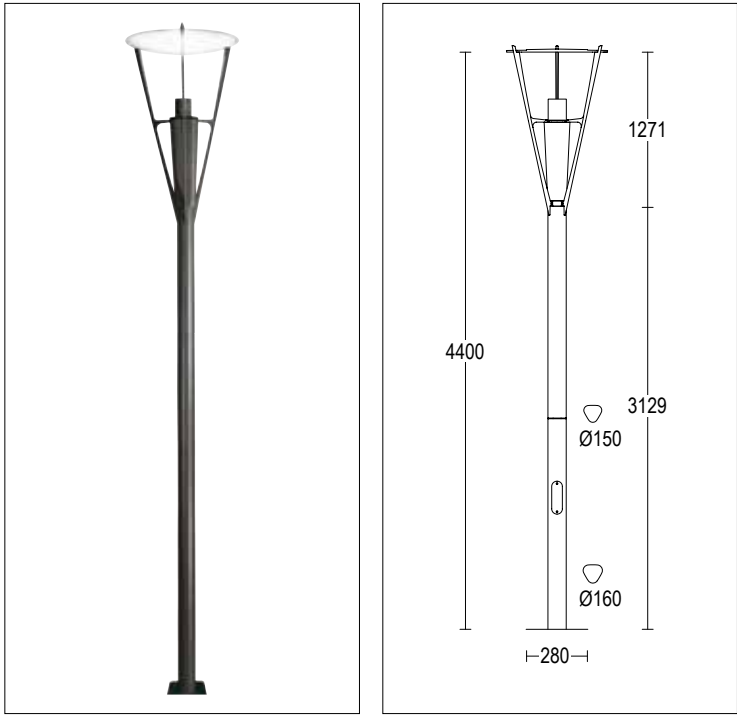

IP65

codice colori


colour codes

.05 grigio antracite
anthracite grey


.13 grigio chiaro
light grey

*


8316.19F.T-- 70 W HIT G12 6600 lm
230 V 50 HZ
vetro trasparente *clear diffuser*
alimentatore ferromagnetico incluso
conventional ballast integral

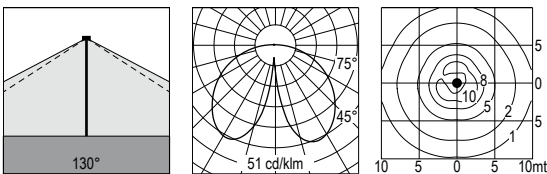

8316.21F.T-- 150 W HIT G12 14000 lm
230 V 50 HZ
vetro trasparente *clear diffuser*
alimentatore ferromagnetico incluso
conventional ballast integral

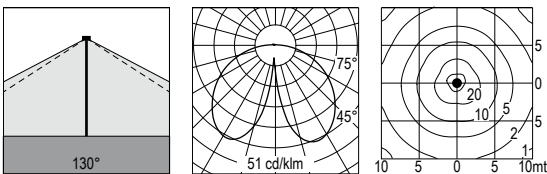

Accessori
Accessories



429
Base di ancoraggio + tiranti da cementare
Plated steel anchorage for concreting

